


\* AS NECESSARY TO MEET TERRAIN AND SIGHT DISTANCE REQUIREMENTS



# NOTES:

1. SEE SEC. 5.01.
2. WSDOT/APWA 9-03.12[4].
3. FLATTER SLOPE MAY BE REQUIRED IN LESS STABLE SOIL.
4. SIX FOOT WOOD FENCE OR HANDRAIL REQUIRED WHEN ROCKERY HEIGHT IS 3' OR GREATER. SEE DWG. NO. 5-006.
5. FOR ROCKERY HEIGHTS EXCEEDING 4', SEE DWG. NO. 5-007.
6. TRAFFIC BARRIERS MAY BE REQUIRED ON ROADS WITH SPEED LIMITS OF 40 MPH OR GREATER, WHERE ROCKERY HEIGHTS EXCEED 6'. SEE CHAPTER 710 OF THE WSDOT DESIGN MANUAL.
7. PERFORATED PIPE SHALL MEET THE REQUIREMENTS OF WSDOT/APWA STANDARDS, SECTION 9.05.

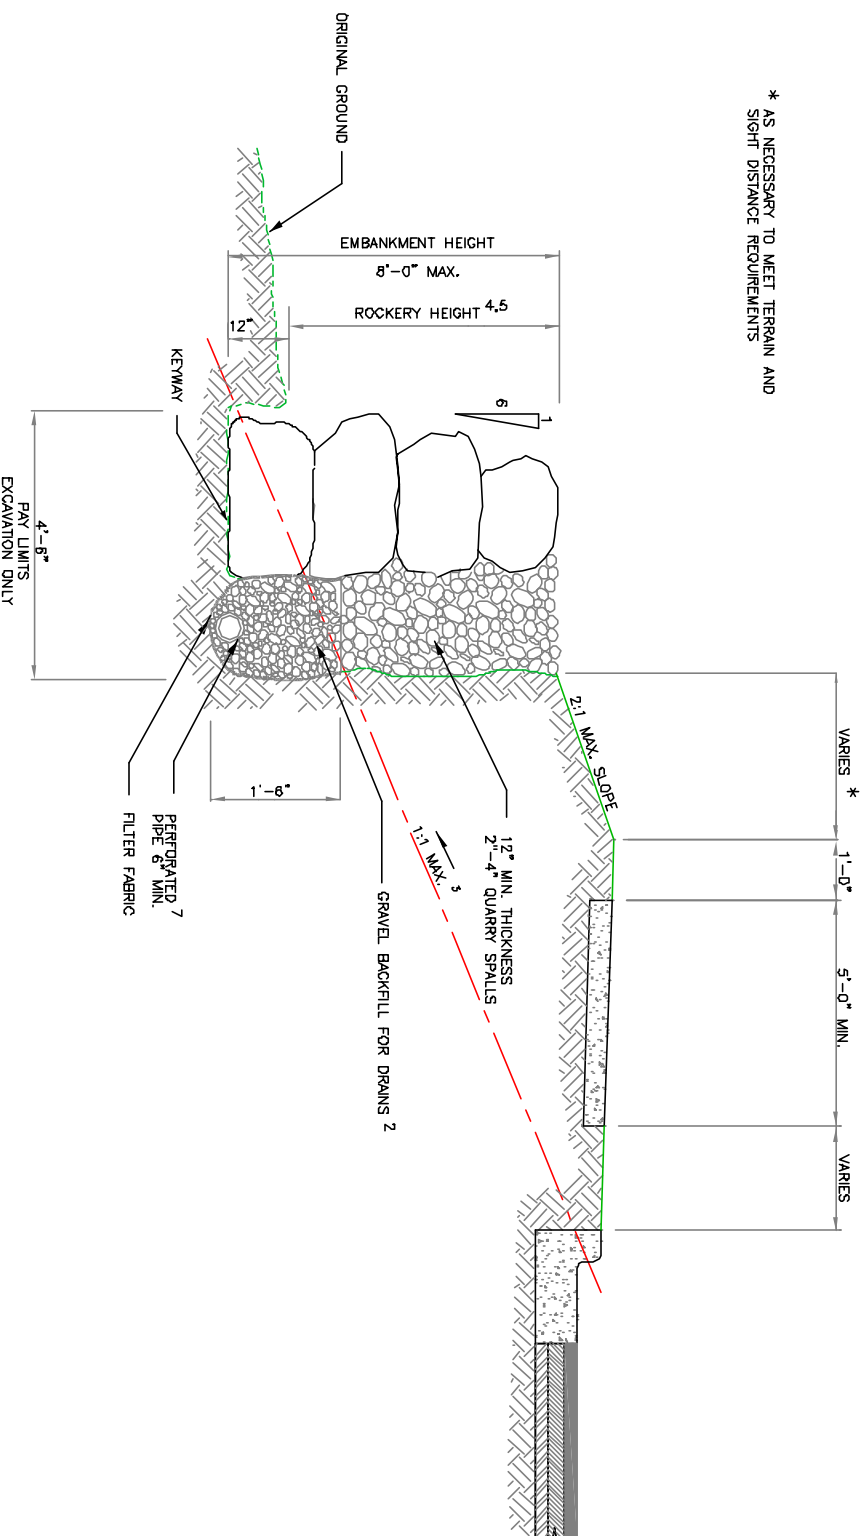

## Rock Facing Fill Section

THE CITY OF MAPLE VALLEY

STANDARD PLAN NO. MV-5-005